


# PURO SET WIDE RIGHT

- unique bathtub sensibly accommodates different needs and desires in a single solution
- built-in bathtub is ideal for both bathing and showering
- clean, minimalist rectangular bathtub with reduced edges
- the centrally located waste and overflow fitting keeps the sense of balance through symmetry
- perfect match for the PURO model range
- backrest to one end provides plenty of space for sitting or relaxed bathing
- steep sides ensure a generously dimensioned interior allowing freedom of movement thanks to the centrally positioned waste
- the reduced depth makes it easier to get in and out of the tub and saves on water consumption.
- made of KALDEWEI steel enamel
- optional anti-slip finish offers maximum safety when showering



Similar illustration

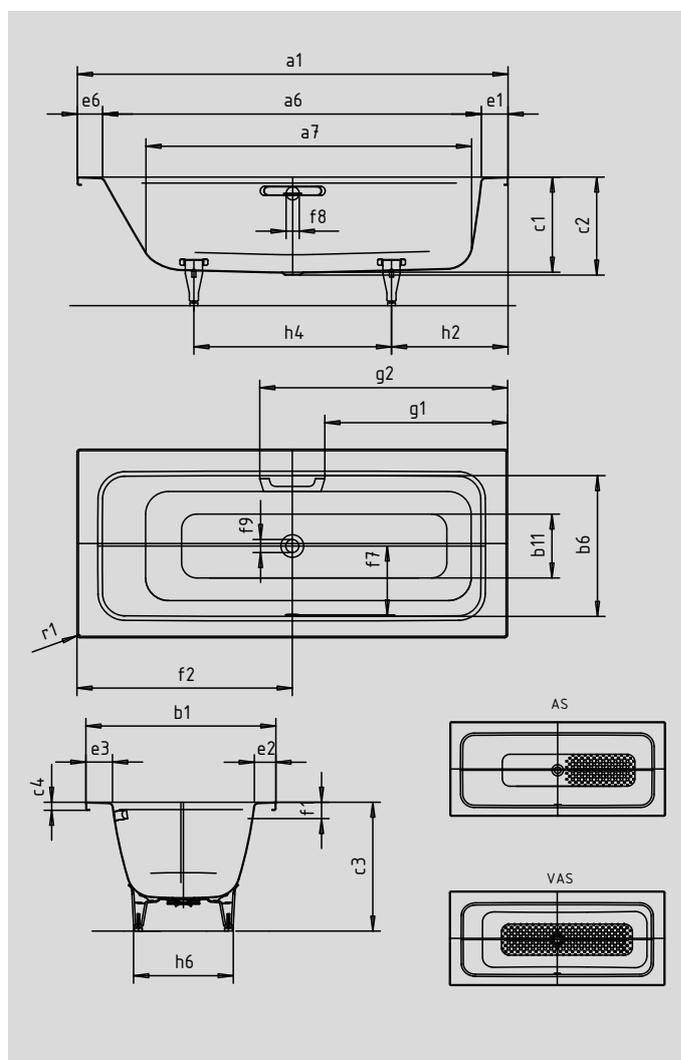

Model No.		667
External length	a <sub>1</sub>	1700 mm
Internal length (top)	a <sub>6</sub>	1495 mm
Internal length (bottom)	a <sub>7</sub>	1300 mm
External width	b <sub>1</sub>	750 mm
Internal width (top)	b <sub>6</sub>	560 mm
Internal width (bottom)	b <sub>11</sub>	435 mm
Internal depth	c <sub>1</sub>	380 mm
Depth including waste outlet	c <sub>2</sub>	390 mm
Height with feet	c <sub>3</sub>	520-553 mm
Height of rim	c <sub>4</sub>	32 mm
Width of rim (foot end)	e <sub>1</sub>	105 mm
Width of rim (lengthwise)	e <sub>2</sub>	85 mm
Width of rim (lengthwise)	e <sub>3</sub>	105 mm
Width of rim (head end)	e <sub>6</sub>	100 mm
Distance top edge to centre of overflow hole	f <sub>1</sub>	70 mm
Distance bath edge to centre of drain hole	f <sub>2</sub>	850 mm
Distance between centre holes	f <sub>7</sub>	270 mm
Diameter of overflow hole	f <sub>8</sub>	52 mm
Diameter of drain hole	f <sub>9</sub>	52 mm
Distance bath edge (foot end) to where grip/handle starts	g <sub>1</sub>	722 mm
Distance bath edge (foot end) to where grip/handle ends	g <sub>2</sub>	978 mm
Distance foot end of bath edge to centre of foot	h <sub>2</sub>	398 mm
Distance between the feet	h <sub>4</sub>	754 mm
Max. width of feet	h <sub>6</sub>	393 mm
Radius	r <sub>1</sub>	12 mm
Water volume** in litres		93
Weight of the enamelled bath in kg		50
Anti-slip		540 x 252 mm
Full anti-slip		1020 x 252 mm

Subject to technical alterations, tolerances and errors. Similar illustration.  
\*\* 70 litres displacement on average.

**KALDEWEI**